






SERIE WA-BIO. EQUIPOS MULTIOPCIONALES

WA-BIO SERIES. MULTI-OPTIONAL EQUIPMENT · SÉRIE WA-BIO. APPAREILS MULTIOPTIONNELS



Aplicación recomendada para sector agrícola-ganadero.
Specially recommended for agricultural and livestock sector.
Spécialement recommandé pour secteur agricole et d'élevage

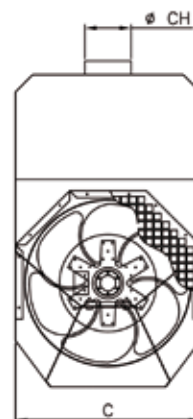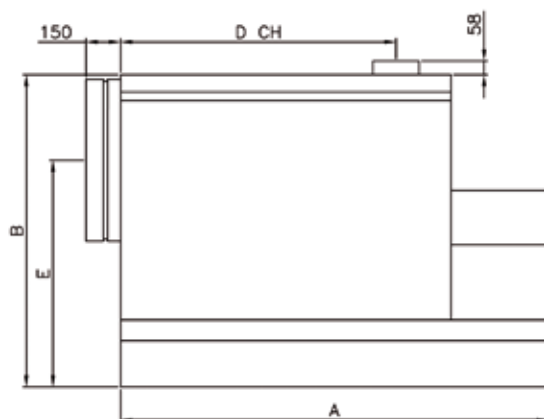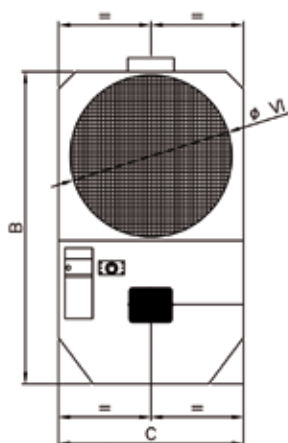

MODELO MODEL MODÈLE	POTENCIA POWER PUISSANCE		CAUDAL AIRE AIR FLOW DÉBIT D'AIR m ³ /h	PRESIÓN PRESSURE PRESSION Pa		TENSIÓN VOLTAGE TENSION V/Hz	NIVEL SONORO SOUND LEVEL NIVEAU SONORE dB(A) 1 m.	MOTOR VENTILADOR FAN MOTOR MOTEUR VENT. Kw	PESO WEIGHT POIDS Kg	MEDIDAS · MEASURES · MESURES (mm)							
	NOM	ÚTIL NET UTILE		AXIAL	CENTRÍFUGO CENTRIFUGE					A		B	C	D CH	Ø CH	E	Ø VI
										Kw	Kw						
WA-BIO-55	64	58	3.600	73	75	II-230-50	73	0,75	117	1.125	1.510	760	560	965	150	610	350
WA-BIO-90	105	95	8.200	75,5	150	III-230/400-50	74	1,5	195	1.500	1.622	1.100	650	915	150	785	600
WA-BIO-150	175	158	11.800	86	150	III-230/400-50	86	2,2	310	1.850	2.010	1.350	800	1.192	200	985	700

OPCIONALES / OPTIONS / EN OPTION

Ventilador centrífugo

Centrifugal fan / Ventilateur centrifuge

Kit portátil (ruedas + tiradores)

Portable kit (wheels + handles) / Kit portable (roue + poignée)











Kit soporte colgar (cáncamos para colgar)

Hangable kit (with eared screws to be hung) / Kit palier pendent (cheville à œuil)

Visera quemador

Burner cover / Visière brûleur

EMBOCADURAS / OUTLET / SORTIES

EQUIPO		MODELO / MODEL / MODÈLE
WA-55		Embocadura impulsión estándar Ø=350
		Nozzle outlet
		Sortie impulsion
		Impulsión rejillas Horizontal o Vertical
		Grids outlet Horizontal or Vertical
		Impulsion grilles Horizontal ou Vertical
		Embocadura impulsión 500x300
		Nozzle outlet
Sortie impulsion		
	Impulsión 2 toberas Ø=250	
	2 nozzle outlet	
	Impulsion 2 sorties	
WA-90		Embocadura impulsión estándar Ø= 600
		Standard nozzle outlet
		Sortie impulsion standard
		Impulsión 4 toberas Ø=250
		4 nozzle outlet
		Impulsión rejillas Horizontal o Vertical
Grids outlet Horizontal or Vertical		
Impulsion grilles Horizontal ou Vertical		
WA-150		Embocadura impulsión estándar Ø=700
		Standard nozzle outlet
		Sortie impulsion standard
		Embocadura impulsión Ø=600
		Nozzle outlet
		Sortie impulsion
		Impulsión 4 toberas Ø=300
		4 nozzle outlet
		Impulsion 4 sorties
Impulsión rejillas Horizontal o Vertical		
Grids outlet Horizontal or Vertical		
		Impulsion grilles Horizontal ou Vertical